


Quick Drain Winterizing Instructions for HydraHorse Systems

1. Make sure the water level in the tank is high enough to cover the float switch in order for the pump to run.



2. Close the valve coming from the water tank to maintain the water level for the pump.
3. Disconnect the brass garden hose fittings that connect the flex hose from the tank to the pump filter. Connect a regular garden hose to the garden hose fitting and direct outside.

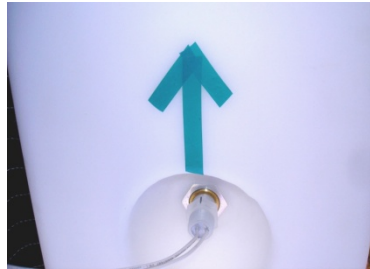

4. Place a shallow pan beneath the other side of the pump, disconnect the fitting that connects the pump to the PEX tubing and let the water from the pump drain into the pan.



5. Flip the toggle switch to “on” and run the pump until it is dry. Leave all water connections disconnected. Leave the pan to catch any leftover drainage.



Quick Drain Winterizing Instructions for HydraHorse Systems

6. Now open the water tank valve located between the tank and the garden hose leading outdoors and let drain. Leave open until next filling.
7. Disconnect each bowl flex tube from the brass quick connect and direct the hose downward.
8. Push the nozzle to drain the bowl line completely.



9. At each bowl bracket, inside and outside the trailer if you have an exterior kit, insert a plug (with tube attached) into the quick coupler and leave it in. Water will drain out from the plug and hose, and the plug will keep the quick connect open for expansion while not in use.



Interior

Exterior

10. Leave everything open for expansion during freezing temperatures.

11. Reverse this process to fill system again.